


ISOBUS spraying application

Product Information

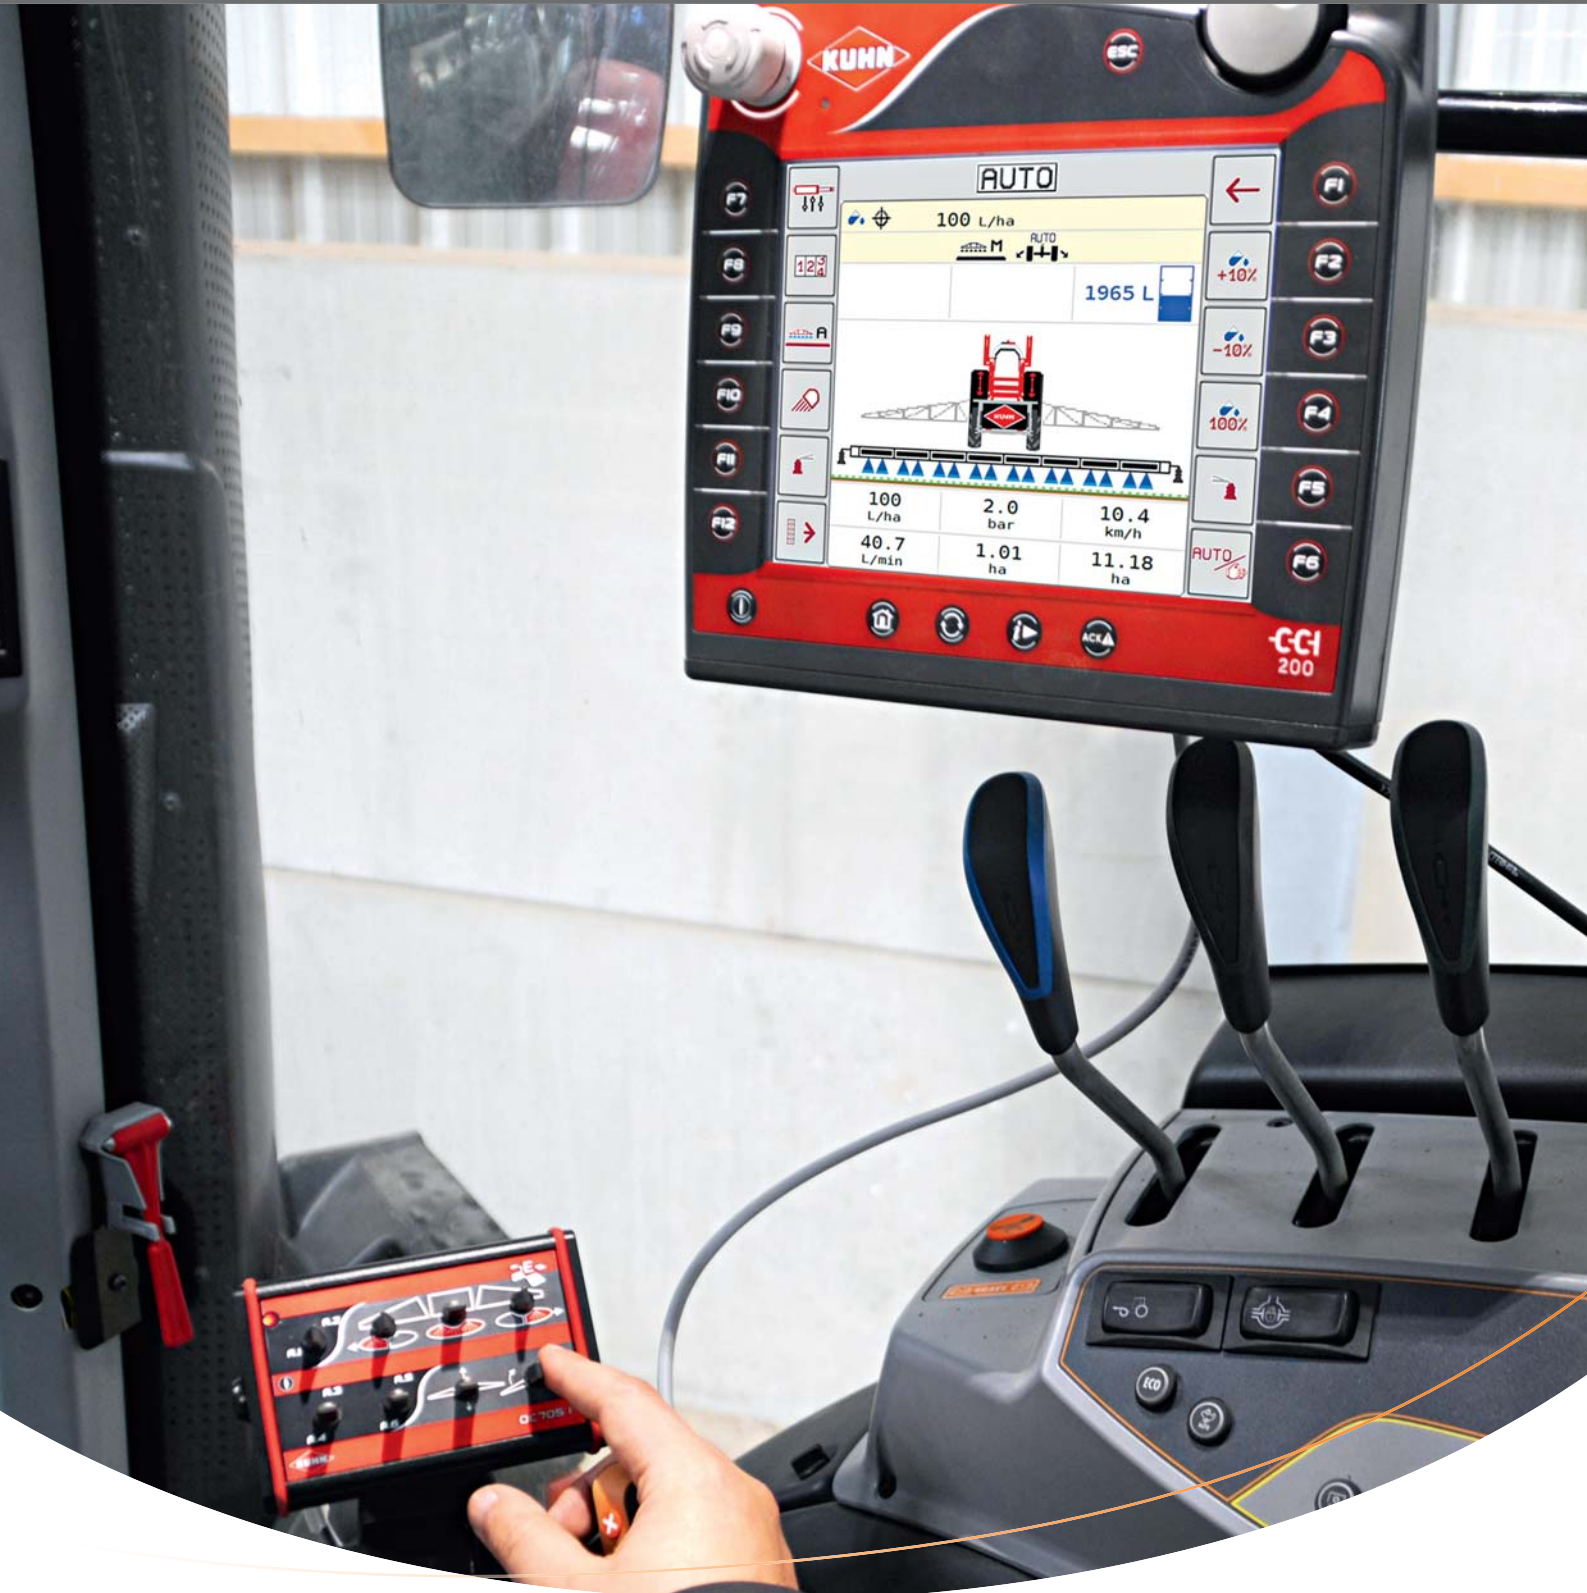

The ISOBUS spraying application allows the machine to be controlled from the tractor's own ISOBUS terminal or CCI 200 solution. The ISOBUS communication protocol allows you to use the same terminal for spraying, application of fertilizer or even sowing. When equipped with the ISOBUS terminal, the sprayer can benefit from section cutout or even dose modulation using the CCI terminal's GPS interface.

KUHN ISOBUS sprayers are equipped with an ISOCLICK control unit, thereby enabling you to maintain control over the machine's primary functions.

Ergonomic operation

The KUHN ISOBUS spraying application was developed to provide you with everything you need to conduct precision spraying operations. It provides all the values you need, which you can then adjust according to your preferences




Maintain control of the spraying operation

For spraying operation, KUHN has developed the "ISOCLICK" ISOBUS control unit. It is designed to be easily installed in the tractor's armrest extension.

This control unit allows you to maintain control of the machine's main functions while working. Even at high speed, you're thus able to easily cut off sections manually, or perfectly manage the machine's hydraulic functions.



Perfectly rinse all of your sprayer's systems

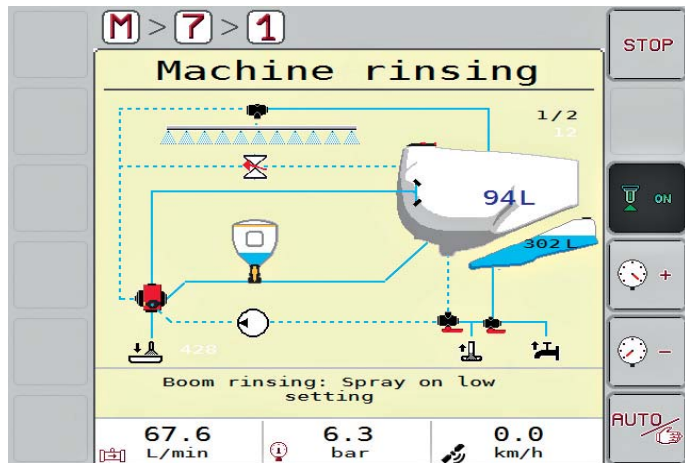

When its time to rinse the spray system or the boom, the ISOBUS spray application displays the system during rinsing.

With the e-SET, you're able to see where the water is directed during rinsing, and thus perfectly control the rinsing sequences. The rinsing cycle sequencing becomes easy and intuitive, and you only have to visually check where the rinsing water is going.

The ISOBUS regulation equipment for the KUHN sprayer is compatible with the entire range.

ALTIS 2



LEXIS



METRIS 2



OCEANIS



For more information about your nearest KUHN dealer, visit our website
www.kuhn.com



Visit us on our YouTube channels.



www.kuhn.com

Your KUHN dealer

KUHN BLANCHARD SAS

24 rue de Nantes - 44680 CHÉMÉRÉ - FRANCE

KUHN NORTH AMERICA, INC.

1501 West Seventh Avenue - P.O. BOX 0167 - Brodhead, WI 53520 - USA

KUHN FARM MACHINERY PTY. LTD

313-325 Foleys Road - Deer Park, VIC, 3023 - AUSTRALIA

KUHN FARM MACHINERY (U.K.) LTD

Stafford Park 7 - GB TELFORD/ SHROPS TF3 3BQ

Information given in this document is only for information purposes and is non-contractual. Our machines are in compliance with regulations in force in the country of delivery. In our literature, and for improved illustration of certain details, some safety devices may not be in operating position. When operating these machines, these devices must be in position in accordance with the requirements indicated in the operator's manuals and assembly manuals. Respect the tractor gross vehicle weight rating, its lift capacity and maximum load per axle and tyres. The tractor front axle load must always comply with the regulations of the country of delivery (In Europe, it must reach minimum 20 % of the tractor net weight). We reserve the right to change any designs, specifications or materials listed without further notice. Machines and equipment in this document can be covered by at least one patent and/or registered design. Trademarks cited in this document may be registered in one or several countries.

Also find KUHN on

