

BARRIER MOWER



McConnel's innovative new barrier mower has been specially designed for cutting around roadside obstacles and guard-rails and is ideal for highway verge maintenance teams and local authorities.

The Barrier Mower's multi-position alignments and mounting options combine with a high-speed blade cutting system to ensure a fast, attractive finish.

McConel is putting verge mowing contractors on the road to success with an innovative new machine that's designed to tackle the toughest challenges of carriageway grass maintenance.

The new McConel Barrier Mower is one of the most nimble and versatile on the market – featuring a high-position flex-arm and twin rotary cutting heads that enable operators to cut around obstacles such as guard rails, and road signs.


By speeding up mowing operations that normally have to be carried out by hand; the Barrier Mower is an important labour-saving device which saves contractors time and money and reduces disruption to motorists by removing the need for coning off sections of road.

Each rotary head features a heavy-duty rubber 'turntable' on the outside rim, which grips an obstacle and enables the heads to part automatically without risk of damage to the machine – leaving behind a fine cut and finish.

The McConel Barrier Mower is compatible with 85hp tractors and above, and is one of the most compact and versatile on the market.

Key features include:

- » 180 degree adjustable dipper arm
- » 1.50m cutting width
- » Two rotary cutting heads
- » Left and right hand cutting
- » Front and rear mounting
- » Follows ground contours
- » Three point linkage mounting
- » Compatible with a wide variety of vehicles including Unimogs

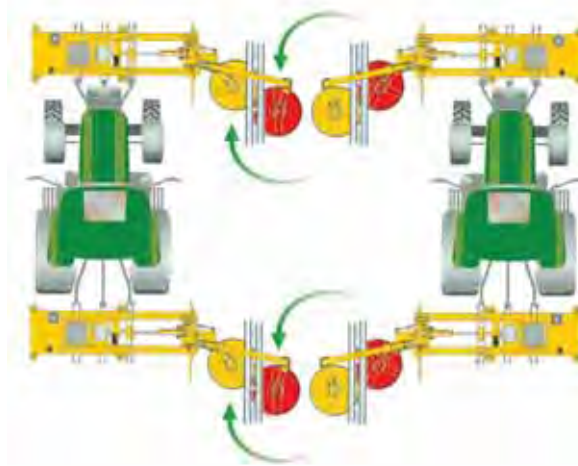

» Cuts Around Barriers



» Fine Cut Finish



» Highway Maintenance

BARRIER MOWER



Machine Features

- » Unique design
- » Maximum working reach 2.3m (to centre of barrier)
- » Three-point linkage mounting
- » Front and rear mount options
- » 1000 PTO
- » Left or right hand cutting
- » Unique flex-arm design
- » Can be mounted on a wide range of vehicles
- » High-capacity 170 litre oil tank
- » Outstanding visibility
- » Purpose-built for highway verge maintenance

Markets

- » Contractors
- » Professional
- » Governmental

Tractor Requirements

- » 1500kg minimum tractor weight
- » 85hp minimum tractor horse power



Tractor Requirements			
Minimum Horse Power Requirements	85hp	Minimum Tractor Weight	4500kg
Machine Specification			
Cutting Width	1.6m (5'2")	Power Arm Horsepower	45hp
Machine Weight with Flailhead (exc.oil)*	1625kg	Oil tank Capacity	170 ltr
Method of Attachment			
3-Point Linkage-Mounted (Cat II)	<input checked="" type="checkbox"/>	5-Point Axle Bracket-Mounted	<input type="checkbox"/>
Standard Equipment	<input checked="" type="checkbox"/>	Optional Equipment	<input type="checkbox"/>
		Not Available	<input type="checkbox"/>

* depending on machine specification excluding attachment and oil